


# Product Datasheet

## Over door mounted unheated safety shower

HU-EXP-23G/OD  
HU-EXP-23GS/OD

Emergency safety shower designed specifically to mount above a door as a space saving option. Small on space, and big on functionality, this unheated safety shower provides a complete decontamination at a flow rate of 76 litres per minute. Meets the requirements of EN15154 and ANSI Z358.1-2014.

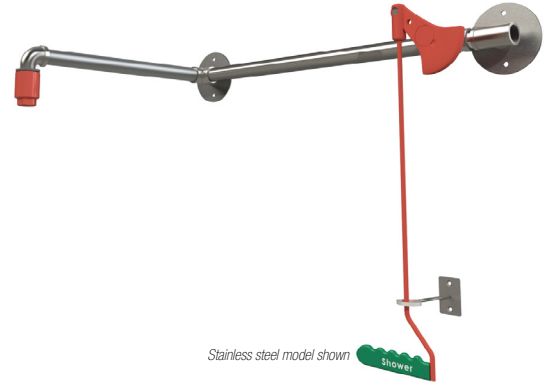

## Specifications

MATERIALS OF CONSTRUCTION	
PIPEWORK & FITTINGS	Stainless steel (GS) or galvanised mild steel (G)
OPERATING VALVE	Stainless steel, full bore, stay open ball valve
SHOWER NOZZLE	Injection moulded nylon 6
STANDARD FINISH	Polished brush (GS) or green powder coated (G)
SERVICES	
WATER INLET	1" male BSP
OPERATING PRESSURE	2 to 6 BAR G / 29 to 87 PSI (higher supply pressures accommodated with the incorporation of the optional pressure reducing valve)
MINIMUM FLOW RATES	76 L per minute / 20 US gal per minute
AMBIENT OPERATING TEMPERATURE	
MINIMUM	5C / 41F
MAXIMUM	35C / 95F
OPERATION	
SHOWER/BODY SPRAY	Pull handle
DIMENSIONS & WEIGHT	
DIMENSIONS (WxDxH)	125mm (4.9in) x 770mm (30.3in) x 637mm (25in)
WEIGHT	3kg (7lb)



# General Arrangement Drawing

## Over door mounted unheated safety shower

HU-EXP-23G/OD  
 HU-EXP-23GS/OD

